


Product Specification WEICAI Delamination Machine for 46 Inch LED LCD Screen.

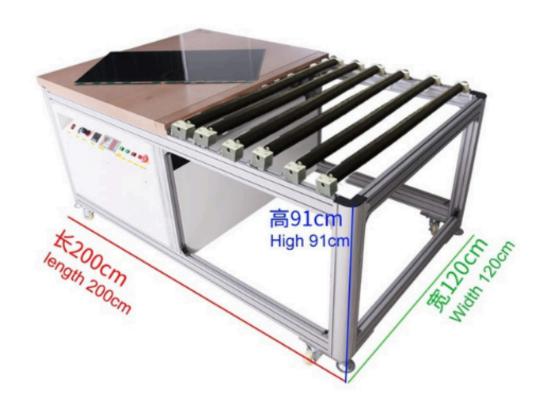

Semi automatic LCD screen polarizing tearing film machine

Device Model	CR-SM38060
Device Name	LCD Screen Polarizing Tear Film machine

Working principle

The principle of polarizing film tearing machine is to manually tear diagonal opening of 8-10cm. Fix it on the tearing film roller of device with adhesive tape. Start high-power inverter motor, peel off the polarizer on the LCD screen.

Equipment use	Polarizer film tearing machine refers to various kinds of LCD assembly and rework process, process equipment for stripping off polarizers of liquid crystal display panels with surface scratches and other undesirable products, especially suitable for thin, large LCD panel polarizer lift-off process.
Equipment Specifications	Suitable for one-time operation of LCD panel within 46 inches,above 46 inches need more operations
Function characteristics	 Select high-precision concentric hobbing steel wheel in the same direction force peeling off film,not easy to slip off,not easily deformed and so on characteristics. Using nine concentric and same level anti-staticrubber ring sets as auxiliary stage,greatly reducing the peeling off film process of due to non-horizontal force or moving resistance arising the breakage rate. Preheating with a temperature controller,built in PID temperature self-tuning function module, can make the speed control more accurate. The device parameters and specifications can be customized and modified according to customer requirements.
Basic parameters	 TECHNOARTS 1. Input power: AC220V 50-60HZ 2. Rated power: 2-6KW 3. Working pressure: 0.4-0.8MPA 4. Peeling off speed: Adjustable 5. Heating method: Constant temperature 6. Temperature range: RT-500°C adjustable 7. Thermocouple: K type 8. Operating mode: Button operation
Equipment material	The main components are steel, electrophoresis aluminum , iron, plastic, etc.
Equipment packaging	Wooden boxes,non-logs (material is glued board, no fumigation is required for export)

Dimensions	2000X1200x910mm(L*W*H)
Package Size	2150X1340X1240mm(L*W*H)
Weight	Net weight 260KG,Gross weight 340KG

